



**Model: 232/670CA/W33**

Basic size of  
 mm

d:	670
D:	1220
B:	438

The basic rated load is  
 kN

trends C:	15400
static state Co:	30500
Fatigue load limit Pu:	1700

Rated rotation speed is  
 r/min

Refer to the speed:	220
limit speed:	360
quality:	2270

model

Column hole:	232/670CA/W33
conical bore:	232/670CAK/W33

Dimensions are  
 mm


d:	670
d <sub>2</sub> ~ :	830
D1 ~ :	1028
b:	22.3
k:	12
r <sub>1,2</sub> the min:	12

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	718
Da the max:	1172
r <sub>a</sub> the max:	10

Calculation coefficient

e:	0.35
Y1:	1.9

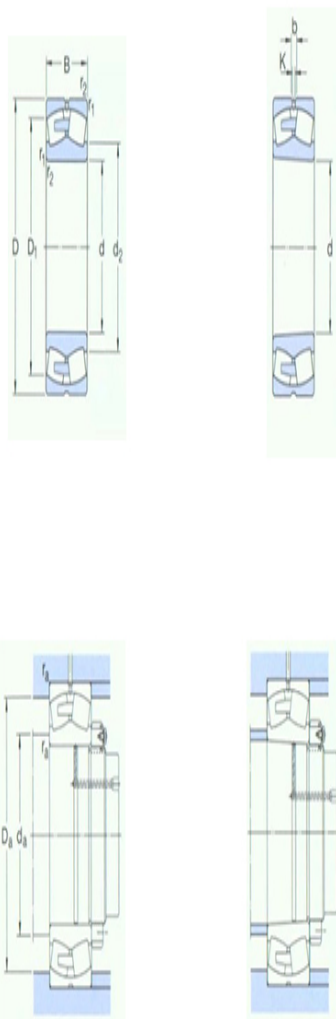

Y2:	2.9
Y0:	1.8