



Model: 238/710CAMA/W2

0

Basic size of  
mm

d:	710
D:	870
B:	118

The basic rated load is  
kN

trends C:	2580
static state Co:	7500
Fatigue load limit Pu:	500

Rated rotation speed is  
r/min

Refer to the speed:	340
limit speed:	670
quality:	153

model

Column hole:	238/710CAMA/W2 0
conical bore:	-



Dimensions are  
mm

d:	710
d <sub>2</sub> ~ :	762
D1 ~ :	826
b:	-
k:	12
r <sub>1,2</sub> the min:	4

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	725
Da the max:	855
r <sub>a</sub> the max:	3

Calculation coefficient

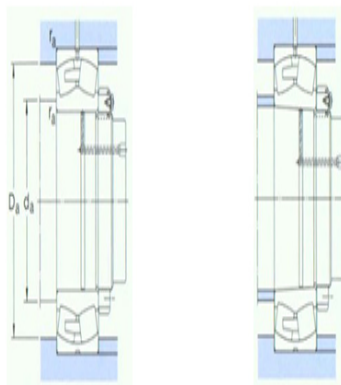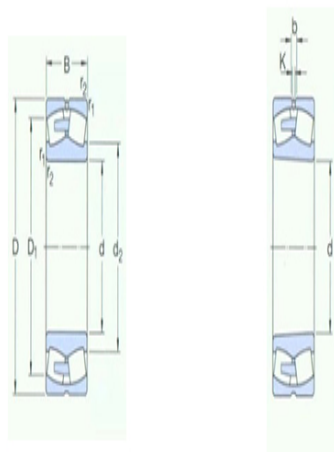

e:	0.11
Y1:	6.1
Y2:	9.1
Y0:	6.3