



**Model: 239/710CA/W33**

Basic size of  
 mm

d:	710
D:	950
B:	180

The basic rated load is  
 kN

trends C:	5600
static state Co:	12000
Fatigue load limit	765
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	340
limit speed:	600
quality:	365

model

Column hole:	*239/710CA/W33
conical bore:	*239/710CAK/W33
	3

Dimensions are  
 mm


d:	710
d <sub>2</sub> ~ :	788
D1 ~ :	882
b:	22.3
k:	12
r <sub>1,2</sub> the min:	6

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	733
Da the max:	927
r <sub>a</sub> the max:	5

Calculation coefficient

e:	0.17
----	------

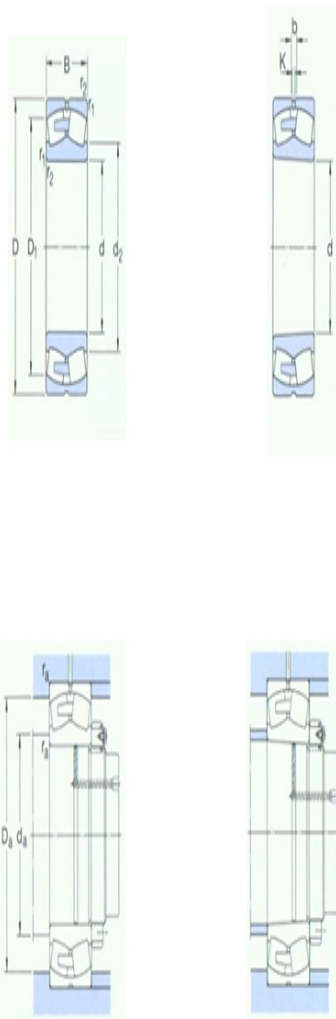

Y1:	4
Y2:	5.9
Y0:	4