



Model: 241/710ECA/W33

Basic size of
 mm

d:	710
D:	1150
B:	438

The basic rated load is
 kN

trends C:	15200
static state Co:	32500
Fatigue load limit Pu:	1900

Rated rotation speed is
 r/min

Refer to the speed:	190
limit speed:	380
quality:	1900

model

Column hole:	241/710ECA/W33
conical bore:	241/710ECAK30/W3 3


Dimensions are
 mm

d:	710
d ₂ ~ :	826
D1 ~ :	989
b:	22.3
k:	12
r _{1,2} the min:	9.5

Shoulder gear and chamfer size
 mm

d _a the min:	750
Da the max:	1110
r _a the max:	8

Calculation coefficient

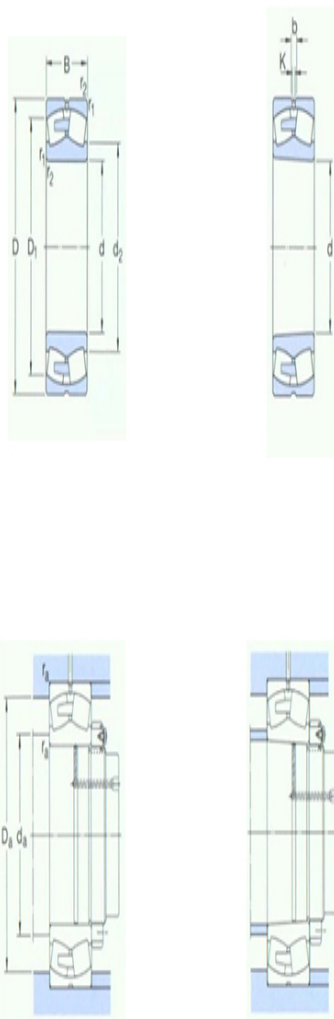

e: 0.37

Y1: 1.8

Y2: 2.7

Y0: 1.8