



Model: 238/750CAMA/W2

0

Basic size of
mm

d:	750
D:	920
B:	128

The basic rated load is
kN

trends C:	2930
static state Co:	8500
Fatigue load limit Pu:	550

Rated rotation speed is
r/min

Refer to the speed:	320
limit speed:	600
quality:	180

model


Column hole:	238/750CAMA/W20
conical bore:	238/750CAKMA/W2 0

Dimensions are
mm

d:	750
d ₂ ~ :	807
D1 ~ :	873
b:	-
k:	12
r _{1,2} the min:	5

Shoulder gear and chamfer size
mm

d _a the min:	768
Da the max:	902
r _a the max:	4

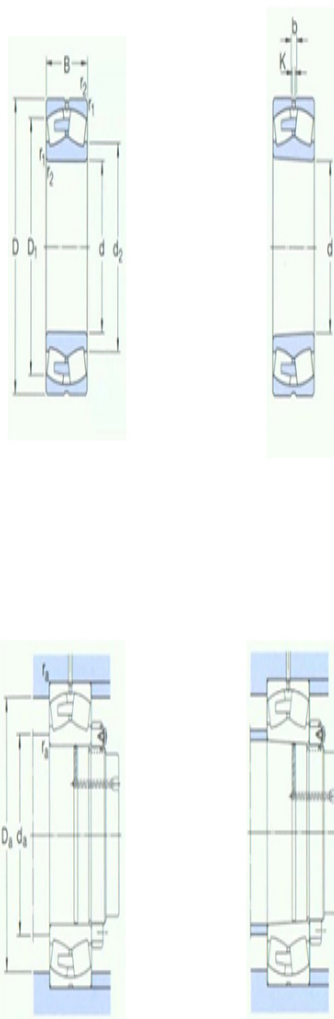

Calculation coefficient

e:	0.11
Y1:	6.1
Y2:	9.1
Y0:	6.3