



Model: 230/750CA/W33

Basic size of
 mm

| | |
|----|------|
| d: | 750 |
| D: | 1090 |
| B: | 250 |

The basic rated load is
 kN

| | |
|-----------------------|-------|
| trends C: | 9650 |
| static state Co: | 18600 |
| Fatigue load limit | 1100 |
| Pu: | |

Rated rotation speed is
 r/min

| | |
|------------------------|-----|
| Refer to the speed: | 300 |
| limit speed: | 530 |
| quality: | 795 |

model

| | |
|---------------|-----------------|
| Column hole: | *230/750CA/W33 |
| conical bore: | *230/750CAK/W33 |
| | 3 |

Dimensions are
 mm


| | |
|---------------------------|------|
| d: | 750 |
| d ₂ ~ : | 860 |
| D1 ~ : | 998 |
| b: | 22.3 |
| k: | 12 |
| r _{1,2} the min: | 7.5 |

Shoulder gear and chamfer size
 mm

| | |
|-------------------------|------|
| d _a the min: | 778 |
| Da the max: | 1062 |
| r _a the max: | 6 |

Calculation coefficient

| | |
|----|------|
| e: | 0.21 |
|----|------|

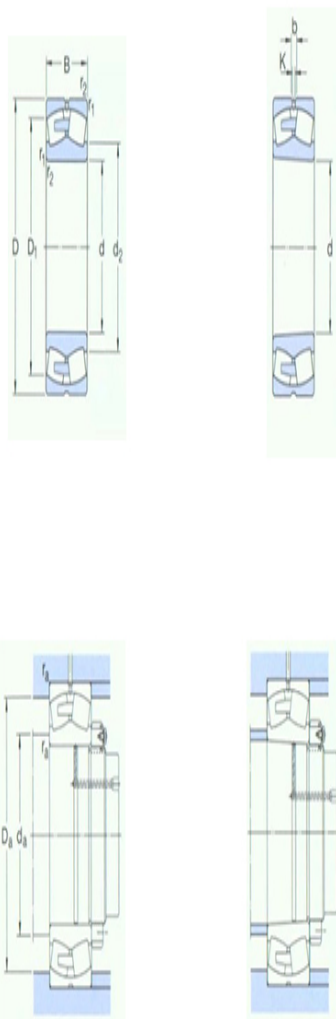

| | |
|-----|-----|
| Y1: | 3.2 |
| Y2: | 4.8 |
| Y0: | 3.2 |