



Model: 240/800ECA/W33

Basic size of
 mm

d:	800
D:	1150
B:	345

The basic rated load is
 kN

trends C:	11100
static state Co:	28500
Fatigue load limit Pu:	1730

Rated rotation speed is
 r/min

Refer to the speed:	220
limit speed:	400
quality:	1200

model

Column hole:	240/800ECA/W33
conical bore:	240/800ECAK30/W3 3


Dimensions are
 mm

d:	800
d ₂ ~ :	908
D1 ~ :	1028
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
 mm

d _a the min:	828
Da the max:	1122
r _a the max:	6

Calculation coefficient

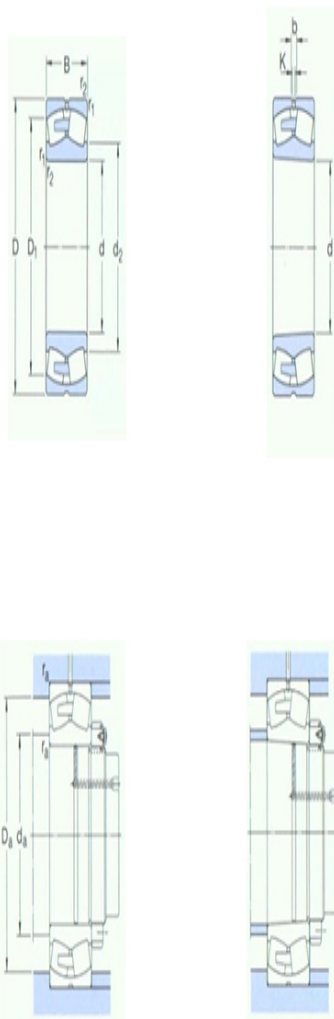

e: 0.27

Y1: 2.5

Y2: 3.7

Y0: 2.5