



Model: 239/710CAK/W33

Basic size of
mm

d:	710
D:	950
B:	180

The basic rated load is
kN

trends C:	5600
static state Co:	12000
Fatigue load limit	765
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	340
limit speed:	600
quality:	365

model

Column hole:	*239/710CA/W33
conical bore:	*239/710CAK/W33
	3

Dimensions are
mm


d:	710
d ₂ ~ :	788
D1 ~ :	882
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
mm

d _a the min:	733
Da the max:	927
r _a the max:	5

Calculation coefficient

e:	0.17
----	------

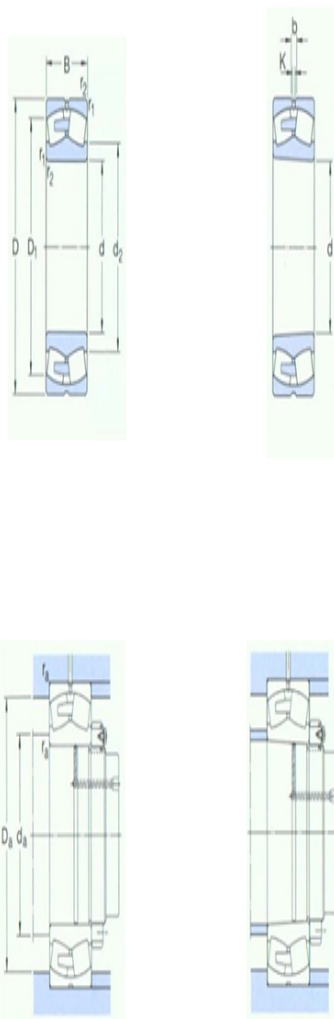

Y1:	4
Y2:	5.9
Y0:	4