



Model: 230/710CAK/W33

Basic size of
 mm

d:	710
D:	1030
B:	236

The basic rated load is
 kN

trends C:	8300
static state Co:	16300
Fatigue load limit	1000
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	320
limit speed:	560
quality:	670

model

Column hole:	*230/710CA/W33
conical bore:	*230/710CAK/W33
	3

Dimensions are
 mm



d:	710
d ₂ ~ :	814
D1 ~ :	941
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
 mm

d _a the min:	738
Da the max:	1002
r _a the max:	6

Calculation coefficient

e:	0.21
----	------

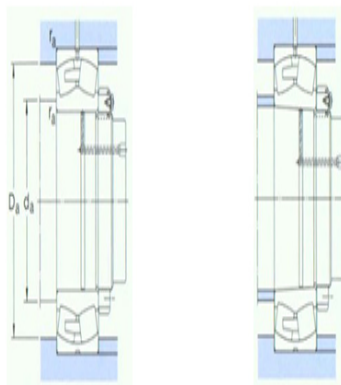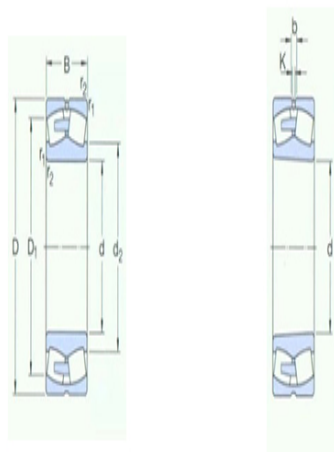

Y1:	3.2
Y2:	4.8
Y0:	3.2