



Model: 231/710CAK/W33

Basic size of
 mm

d:	710
D:	1150
B:	345

The basic rated load is
 kN

trends C:	12200
static state Co:	26000
Fatigue load limit Pu:	1530

Rated rotation speed is
 r/min

Refer to the speed:	240
limit speed:	450
quality:	1450

model

Column hole:	231/710CA/W33
conical bore:	231/710CAK/W33

Dimensions are
 mm


d:	710
d ₂ ~ :	850
D1 ~ :	1097
b:	22.3
k:	12
r _{1,2} the min:	9.5

Shoulder gear and chamfer size
 mm

d _a the min:	750
Da the max:	1110
r _a the max:	8

Calculation coefficient

e:	0.28
Y1:	2.4

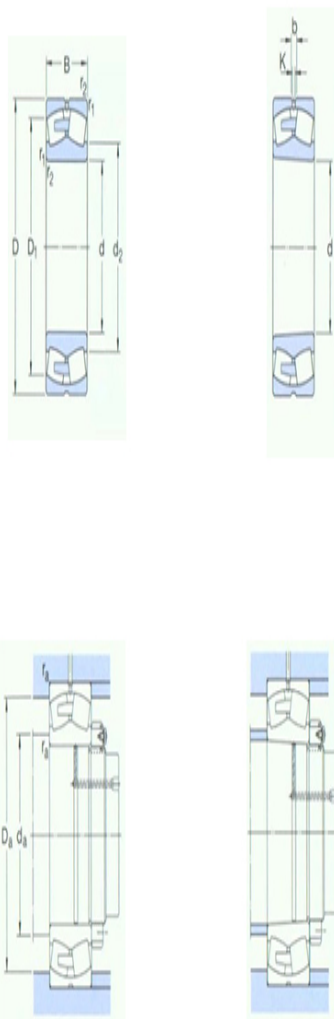

Y2:	3.6
Y0:	2.5