



Model: 232/710CAK/W33

Basic size of
 mm

d:	710
D:	1280
B:	450

The basic rated load is
 kN

trends C:	17600
static state Co:	34500
Fatigue load limit Pu:	2000

Rated rotation speed is
 r/min

Refer to the speed:	200
limit speed:	320
quality:	2610

model

Column hole:	232/710CA/W33
conical bore:	232/710CAK/W33

Dimensions are
 mm


d:	710
d ₂ ~ :	875
D1 ~ :	1017
b:	22.3
k:	12
r _{1,2} the min:	12

Shoulder gear and chamfer size
 mm

d _a the min:	758
Da the max:	1232
r _a the max:	10

Calculation coefficient

e:	0.35
Y1:	1.9

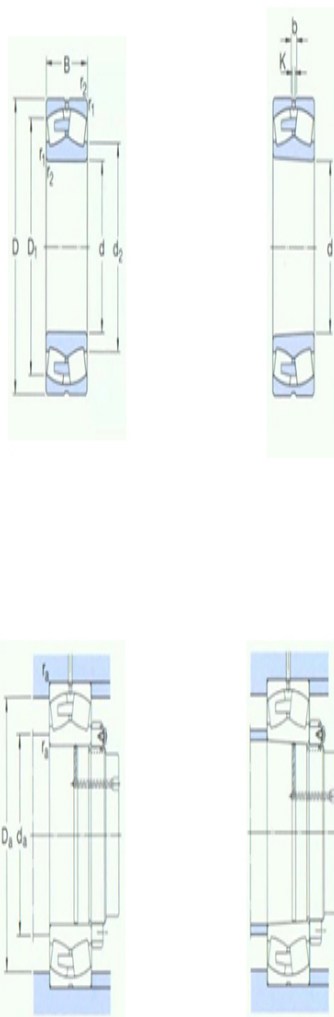

Y2:	2.9
Y0:	1.8