



Model: 230/750CAK/W33

Basic size of
 mm

d:	750
D:	1090
B:	250

The basic rated load is
 kN

trends C:	9650
static state Co:	18600
Fatigue load limit	1100
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	300
limit speed:	530
quality:	795

model

Column hole:	*230/750CA/W33
conical bore:	*230/750CAK/W33
	3

Dimensions are
 mm


d:	750
d ₂ ~ :	860
D1 ~ :	998
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
 mm

d _a the min:	778
Da the max:	1062
r _a the max:	6

Calculation coefficient

e:	0.21
----	------

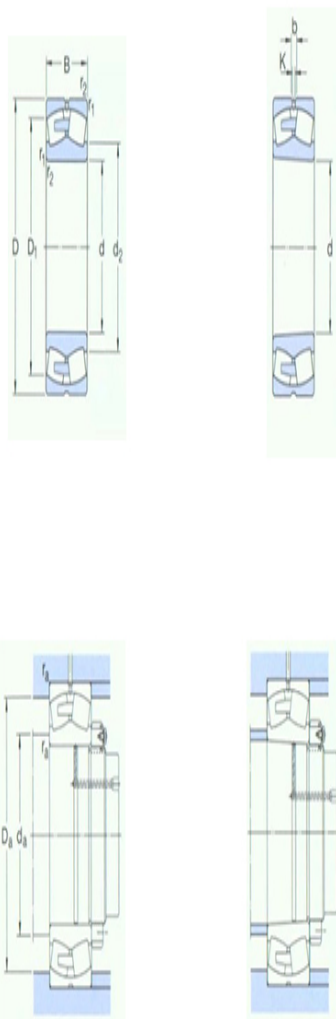

Y1:	3.2
Y2:	4.8
Y0:	3.2