



Model: 230/800CAK/W33

Basic size of
 mm

d:	800
D:	1150
B:	258

The basic rated load is
 kN

trends C:	10000
static state Co:	20000
Fatigue load limit	1160
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	280
limit speed:	480
quality:	895

model

Column hole:	*230/800CA/W33
conical bore:	*230/800CAK/W33
	3

Dimensions are
 mm


d:	800
d ₂ ~ :	915
D1 ~ :	1053
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
 mm

d _a the min:	828
Da the max:	1122
r _a the max:	6

Calculation coefficient

e:	0.2
----	-----

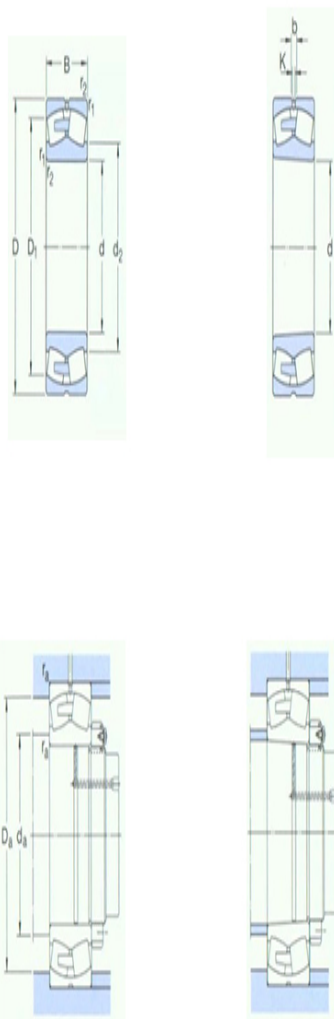

Y1:	3.4
Y2:	5
Y0:	3.2