



**Model: 231/850CA/W33**

Basic size of  
 mm

d:	850
D:	1360
B:	400

The basic rated load is  
 kN

trends C:	16100
static state Co:	34500
Fatigue load limit Pu:	2000

Rated rotation speed is  
 r/min

Refer to the speed:	180
limit speed:	360
quality:	2200

model

Column hole:	231/850CA/W33
conical bore:	231/850CAK/W33

Dimensions are  
 mm


d:	850
d <sub>2</sub> ~ :	1010
D1 ~ :	1205
b:	22.3
k:	12
r <sub>1,2</sub> the min:	12

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	898
Da the max:	1312
r <sub>a</sub> the max:	10

Calculation coefficient

e:	0.28
Y1:	2.4

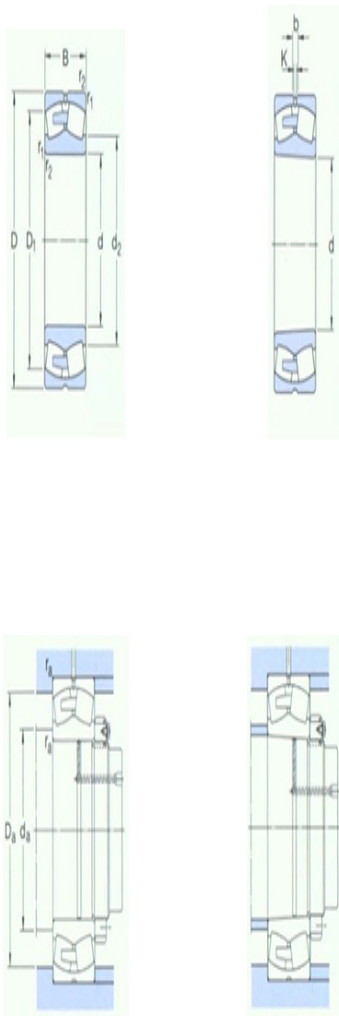

Y2:	3.6
Y0:	2.5