



Model: 241/850ECAF/W33

Basic size of
mm

d:	850
D:	1360
B:	500

The basic rated load is
kN

trends C:	20200
static state Co:	45000
Fatigue load limit Pu:	2550

Rated rotation speed is
r/min

Refer to the speed:	150
limit speed:	300
quality:	2710

model


Column hole:	241/850ECAF/W33
conical bore:	241/850ECAK30F/W3 3

Dimensions are
mm

d:	850
d ₂ ~ :	988
D1 ~ :	1182
b:	22.3
k:	12
r _{1,2} the min:	12

Shoulder gear and chamfer size
mm

d _a the min:	898
Da the max:	1312

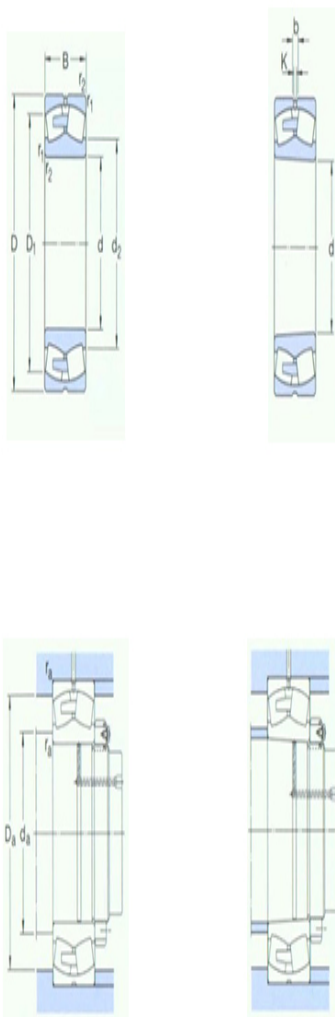

r_a the max: 10

Calculation coefficient

e: 0.35

Y1: 1.9

Y2: 2.9

Y0: 1.8