



Model: 230/900CA/W33

Basic size of
mm

| | |
|----|------|
| d: | 900 |
| D: | 1280 |
| B: | 280 |

The basic rated load is
kN

| | |
|------------------------|-------|
| trends C: | 10100 |
| static state Co: | 23200 |
| Fatigue load limit Pu: | 1340 |

Rated rotation speed is
r/min

| | |
|---------------------|------|
| Refer to the speed: | 220 |
| limit speed: | 400 |
| quality: | 1200 |

model

| | |
|---------------|----------------|
| Column hole: | 230/900CA/W33 |
| conical bore: | 230/900CAK/W33 |

Dimensions are
mm


| | |
|---------------------------|------|
| d: | 900 |
| d ₂ ~ : | 1023 |
| D1 ~ : | 1176 |
| b: | 22.3 |
| k: | 12 |
| r _{1,2} the min: | 7.5 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|------|
| d _a the min: | 928 |
| Da the max: | 1252 |
| r _a the max: | 6 |

Calculation coefficient

| | |
|-----|-----|
| e: | 0.2 |
| Y1: | 3.4 |

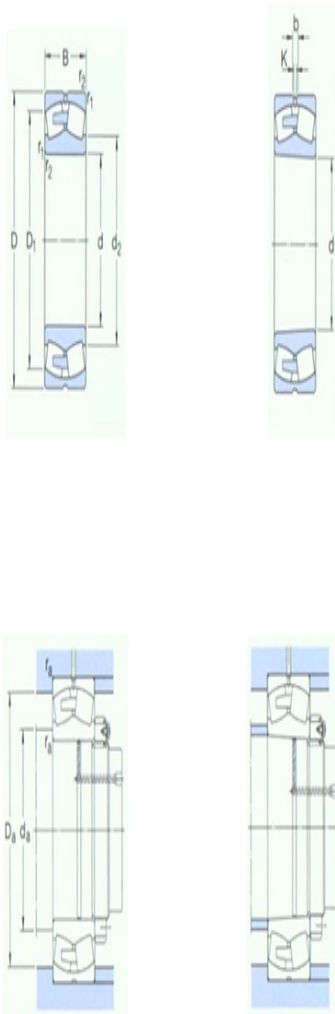

| | |
|-----|-----|
| Y2: | 5 |
| Y0: | 3.2 |