



Model: 241/950ECAFW33

Basic size of
mm

| | |
|----|------|
| d: | 950 |
| D: | 1500 |
| B: | 545 |

The basic rated load is
kN

| | |
|------------------------------|-------|
| trends C: | 23900 |
| static state Co: | 55000 |
| Fatigue load limit Pu: | 3000 |

Rated rotation speed is
r/min

| | |
|------------------------|------|
| Refer to the speed: | 130 |
| limit speed: | 260 |
| quality: | 3535 |

model


| | |
|------------------|------------------------|
| Column hole: | 241/950ECAFW33 |
| conical bore: | 241/950ECAK30F/W3 3 |

Dimensions are
mm

| | |
|------------------------------|------|
| d: | 950 |
| d ₂ ~ : | 1102 |
| D1 ~ : | 1305 |
| b: | 22.3 |
| k: | 12 |
| r _{1,2} the min: | 12 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|------|
| d _a the min: | 998 |
| Da the max: | 1452 |

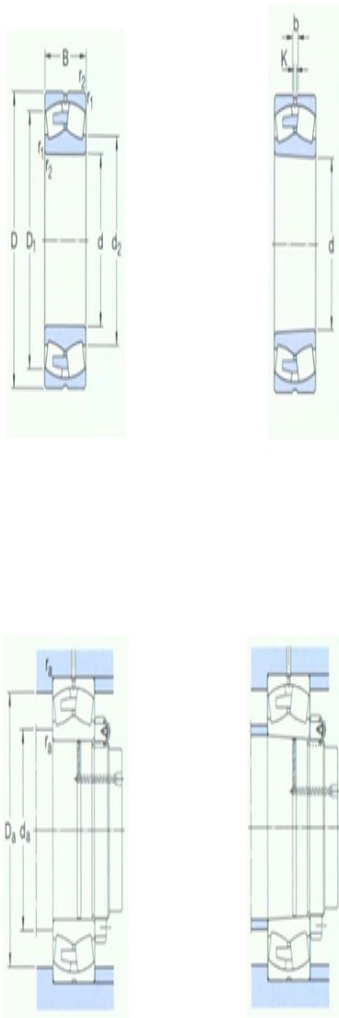

r_a the max: 10

Calculation coefficient

e: 0.35

Y1: 1.9

Y2: 2.9

Y0: 1.8