



Model: 238/1000CAMA/W2

0

Basic size of  
mm

d:	1000
D:	1220
B:	165

The basic rated load is  
kN

trends C:	4660
static state Co:	14300
Fatigue load limit Pu:	865

Rated rotation speed is  
r/min

Refer to the speed:	220
limit speed:	400
quality:	410

model

Column hole:	238/1000CAMA/W20
conical bore:	238/1000CAKMA/W20


Dimensions are  
mm

d:	1000
d <sub>2</sub> ~ :	1077
D1 ~ :	1161
b:	-
k:	12
r <sub>1,2</sub> the min:	6

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	1023
Da the max:	1197
r <sub>a</sub> the max:	5

Calculation coefficient

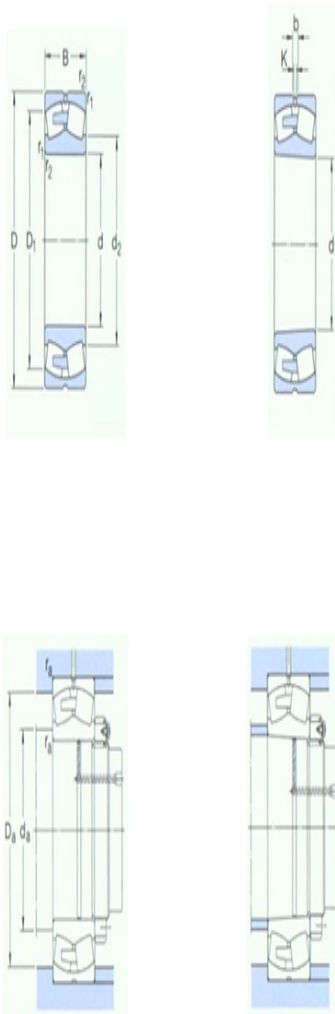

e:	0.12
Y1:	5.6
Y2:	8.4
Y0:	5.6