



Model: 238/1060CAMA/W20

0

Basic size of  
mm

d:	1060
D:	1280
B:	165

The basic rated load is  
kN

trends C:	4770
static state Co:	15000
Fatigue load limit Pu:	800

Rated rotation speed is  
r/min

Refer to the speed:	200
limit speed:	380
quality:	435

model

Column hole:	238/1060CAMA/W20
conical bore:	238/1060CAKMA/W20
	0


Dimensions are  
mm

d:	1060
d <sub>2</sub> ~ :	1135
D1 ~ :	1219
b:	-
k:	12
r <sub>1,2</sub> the min:	6

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	1083
Da the max:	1257
r <sub>a</sub> the max:	5

Calculation coefficient

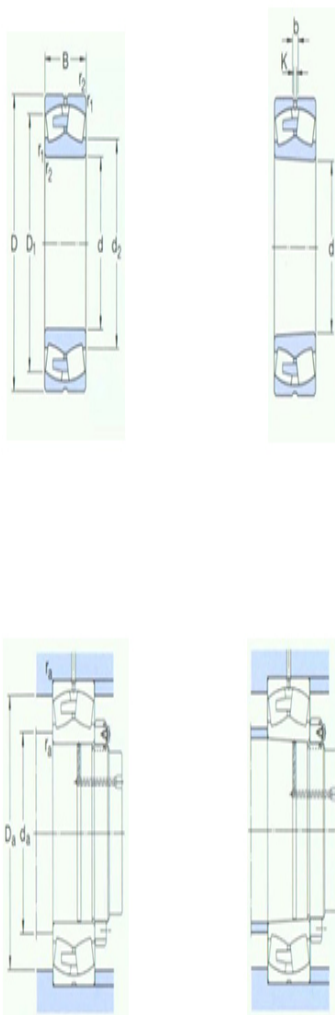

e:	0.11
Y1:	6.1
Y2:	9.1
Y0:	6.3