



Model: 248/1060CAMA/W2

0

Basic size of
mm

d:	1060
D:	1280
B:	218

The basic rated load is
kN

trends C:	6100
static state Co:	20000
Fatigue load limit	1200
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	200
limit speed:	380
quality:	570

model


Column hole:	248/1060CAMA/W20
conical bore:	248/1060CAK30MA/W2 0

Dimensions are
mm

d:	1060
d ₂ ~ :	1135
D1 ~ :	1210
b:	-
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
mm

d _a the min:	1083
Da the	1257

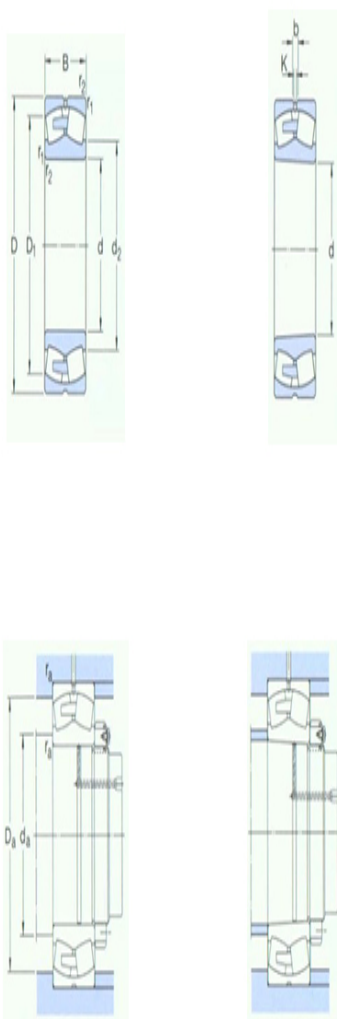

max:

r_a the max: 5

Calculation coefficient

e: 0.14

Y1: 4.8

Y2: 7.2

Y0: 4.5