



Model: 240/1060CAF/W33

Basic size of
mm

d:	1060
D:	1500
B:	438

The basic rated load is
kN

trends C:	17300
static state Co:	45500
Fatigue load limit Pu:	2500

Rated rotation speed is
r/min

Refer to the speed:	150
limit speed:	260
quality:	2515

model


Column hole:	240/1060CAF/W33
conical bore:	240/1060CAK30F/W3 3

Dimensions are
mm

d:	1060
d ₂ ~ :	1196
D1 ~ :	1349
b:	22.3
k:	12
r _{1,2} the min:	9.5

Shoulder gear and chamfer size
mm

d _a the min:	1094
Da the max:	1466

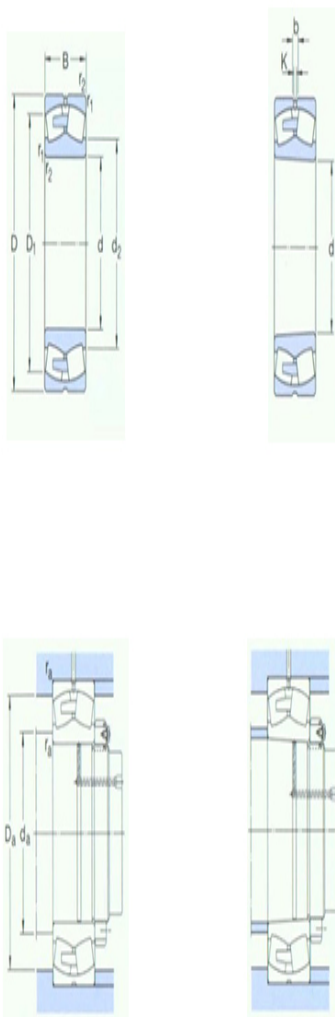

r_a the max: 8

Calculation coefficient

e: 0.26

Y1: 2.6

Y2: 3.9

Y0: 2.5