



Model: 248/1120CAFA/W2

0

Basic size of  
mm

d:	1120
D:	1360
B:	243

The basic rated load is  
kN

trends C:	7250
static state Co:	24000
Fatigue load limit Pu:	1400

Rated rotation speed is  
r/min

Refer to the speed:	180
limit speed:	340
quality:	735

model


Column hole:	248/1120CAFA/W20
conical bore:	248/1120CAK30FA/W2 0

Dimensions are  
mm

d:	1120
d <sub>2</sub> ~ :	1202
D1 ~ :	1282
b:	-
k:	12
r <sub>1,2</sub> the min:	6

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	1143
----------------------------	------

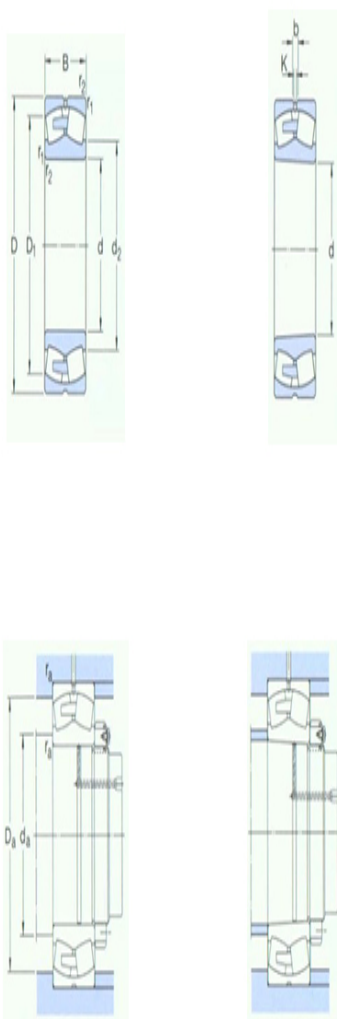

Da the max:	1337
r <sub>a</sub> the max:	5

Calculation coefficient

e:	0.15
Y1:	4.5
Y2:	6.7
Y0:	4.5