



**Model: 230/850CAK/W33**

Basic size of  
mm

d:	850
D:	1220
B:	272

The basic rated load is  
kN

trends C:	9370
static state Co:	21600
Fatigue load limit Pu:	1270

Rated rotation speed is  
r/min

Refer to the speed:	240
limit speed:	450
quality:	1050

model

Column hole:	230/850CA/W33
conical bore:	230/850CAK/W33

Dimensions are  
mm


d:	850
d <sub>2</sub> ~ :	969
D1 ~ :	1117
b:	22.3
k:	12
r <sub>1,2</sub> the min:	7.5

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	878
Da the max:	1192
r <sub>a</sub> the max:	6

Calculation coefficient

e:	0.2
Y1:	3.4

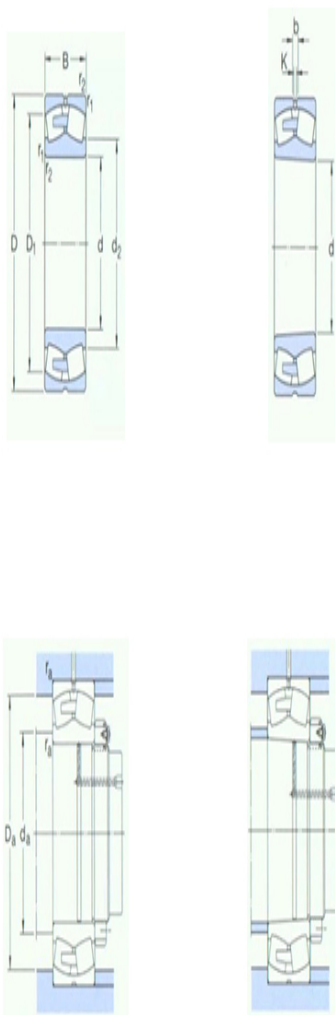

Y2:	5
Y0:	3.2