



Model: 248/900CAK30MA/W2

0

Basic size of
mm

d:	900
D:	1090
B:	190

The basic rated load is
kN

trends C:	4660
static state Co:	15300
Fatigue load limit	950
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	240
limit speed:	480
quality:	370

model

Column hole:	248/900CAMA/W20
conical bore:	248/900CAK30MA/W2 0


Dimensions are
mm

d:	900
d ₂ ~ :	966
D1 ~ :	1029
b:	-
k:	12
r _{1,2} the min:	5

Shoulder gear and chamfer size
mm

d _a the min:	918
Da the max:	1072
r _a the max:	4

Calculation coefficient

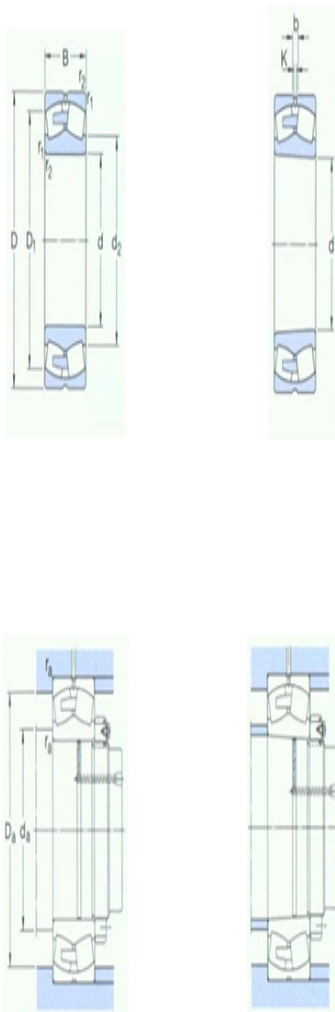

e: 0.14

Y1: 4.8

Y2: 7.2

Y0: 4.5