



Model: 239/950CAK/W33

Basic size of
mm

d:	950
D:	1250
B:	224

The basic rated load is
kN

trends C:	7250
static state Co:	19600
Fatigue load limit Pu:	1120

Rated rotation speed is
r/min

Refer to the speed:	220
limit speed:	430
quality:	755

model

Column hole:	239/950CA/W33
conical bore:	239/950CAK/W33

Dimensions are
mm



d:	950
d ₂ ~ :	1049
D1 ~ :	1164
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
mm

d _a the min:	978
Da the max:	1222
r _a the max:	6

Calculation coefficient

e:	0.15
Y1:	4.5

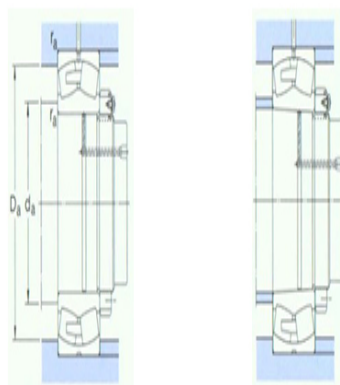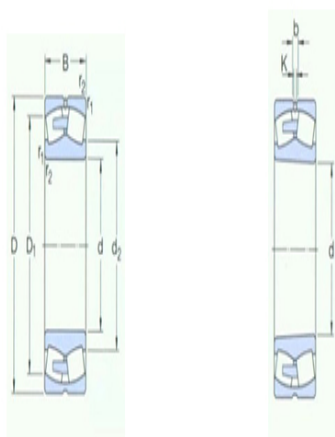

Y2:	6.7
Y0:	4.5