



Model: 238/1000CAKMA/W2

0

Basic size of
mm

d:	1000
D:	1220
B:	165

The basic rated load is
kN

trends C:	4660
static state Co:	14300
Fatigue load limit	865
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	220
limit speed:	400
quality:	410

model

Column hole:	238/1000CAMA/W20
conical bore:	238/1000CAKMA/W20


Dimensions are
mm

d:	1000
d ₂ ~ :	1077
D1 ~ :	1161
b:	-
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
mm

d _a the min:	1023
Da the max:	1197
r _a the max:	5

Calculation coefficient

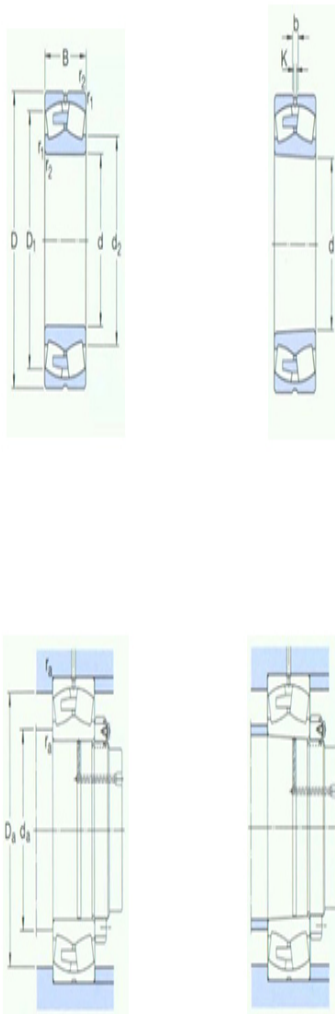

e:	0.12
Y1:	5.6
Y2:	8.4
Y0:	5.6