



Model: 238/1060CAKMA/W2

0

Basic size of  
mm

|    |      |
|----|------|
| d: | 1060 |
| D: | 1280 |
| B: | 165  |

The basic rated load is  
kN

|                       |       |
|-----------------------|-------|
| trends C:             | 4770  |
| static state Co:      | 15000 |
| Fatigue load<br>limit | 800   |
| Pu:                   |       |

Rated rotation speed is  
r/min

|                        |     |
|------------------------|-----|
| Refer to the<br>speed: | 200 |
| limit speed:           | 380 |
| quality:               | 435 |

model

|               |                   |
|---------------|-------------------|
| Column hole:  | 238/1060CAMA/W20  |
| conical bore: | 238/1060CAKMA/W20 |


Dimensions are  
mm

|                           |      |
|---------------------------|------|
| d:                        | 1060 |
| d <sub>2</sub> ~ :        | 1135 |
| D1 ~ :                    | 1219 |
| b:                        | -    |
| k:                        | 12   |
| r <sub>1,2</sub> the min: | 6    |

Shoulder gear and chamfer size  
mm

|                         |      |
|-------------------------|------|
| d <sub>a</sub> the min: | 1083 |
| Da the max:             | 1257 |
| r <sub>a</sub> the max: | 5    |

Calculation coefficient

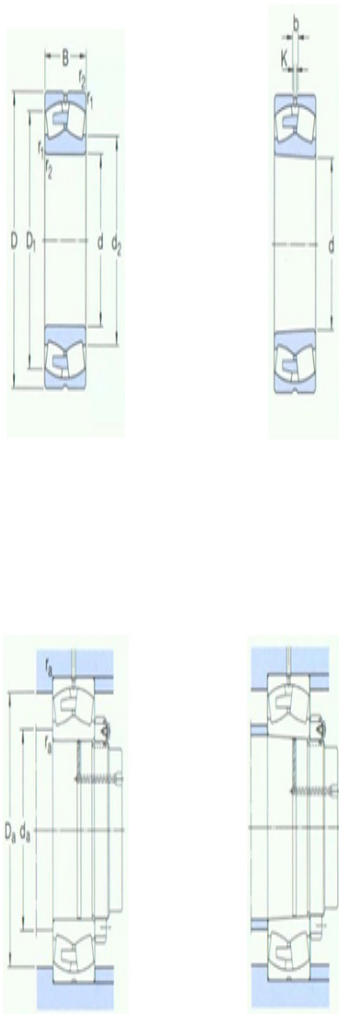

|     |      |
|-----|------|
| e:  | 0.11 |
| Y1: | 6.1  |
| Y2: | 9.1  |
| Y0: | 6.3  |