



Model: 248/1060CAK30MA/W2

0

Basic size of
mm

d:	1060
D:	1280
B:	218

The basic rated load is
kN

trends C:	6100
static state Co:	20000
Fatigue load limit Pu:	1200

Rated rotation speed is
r/min

Refer to the speed:	200
limit speed:	380
quality:	570

model

Column hole:	248/1060CAMA/W20
conical bore:	248/1060CAK30MA/W20

Dimensions are
mm


d:	1060
d ₂ ~ :	1135
D1 ~ :	1210
b:	-
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
mm

d _a the min:	1083
Da the max:	1257
r _a the max:	5

Calculation coefficient

e:	0.14
----	------

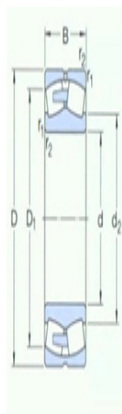

Y1:	4.8
Y2:	7.2
Y0:	4.5