



Model: 240/1060CAK30F/W3

3

Basic size of
mm

d:	1060
D:	1500
B:	438

The basic rated load is
kN

trends C:	17300
static state Co:	45500
Fatigue load limit	2500
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	150
limit speed:	260
quality:	2515

model

Column hole:	240/1060CAF/W33
conical bore:	240/1060CAK30F/W3 3


Dimensions are
mm

d:	1060
d ₂ ~ :	1196
D1 ~ :	1349
b:	22.3
k:	12
r _{1,2} the min:	9.5

Shoulder gear and chamfer size
mm

d _a the min:	1094
Da the max:	1466
r _a the max:	8

Calculation coefficient

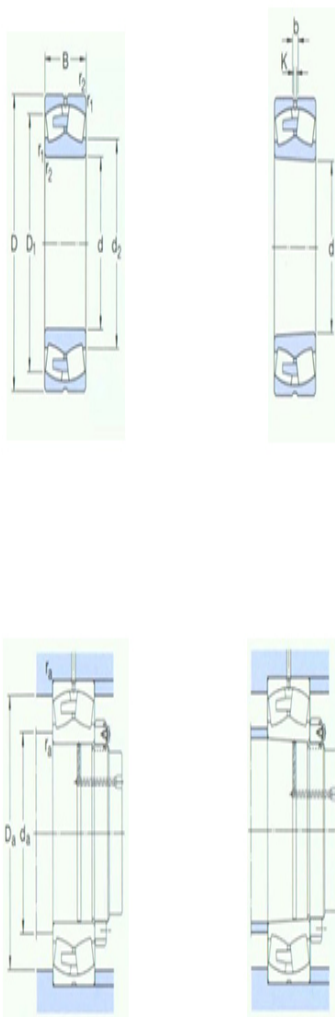

e:	0.26
Y1:	2.6
Y2:	3.9
Y0:	2.5