



Model: 248/1320CAFA/W2

0

Basic size of
mm

| | |
|----|------|
| d: | 1320 |
| D: | 1600 |
| B: | 280 |

The basic rated load is
kN

| | |
|------------------------------|-------|
| trends C: | 9780 |
| static state Co: | 33500 |
| Fatigue load limit Pu: | 1860 |

Rated rotation speed is
r/min

| | |
|------------------------|------|
| Refer to the speed: | 140 |
| limit speed: | 260 |
| quality: | 1160 |

model


| | |
|------------------|-------------------------|
| Column hole: | 248/1320CAFA/W20 |
| conical bore: | 248/1320CAK30FA/W2 0 |

Dimensions are
mm

| | |
|------------------------------|------|
| d: | 1320 |
| d ₂ ~ : | 1417 |
| D1 ~ : | 1511 |
| b: | - |
| k: | 12 |
| r _{1,2} the min: | 6 |

Shoulder gear and chamfer size
mm

| | |
|----------------------------|------|
| d _a the min: | 1343 |
|----------------------------|------|

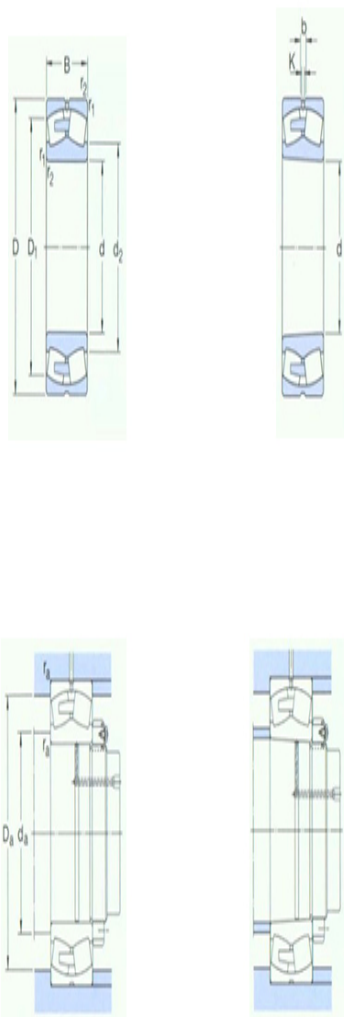

| | |
|----------------------------|------|
| Da the max: | 1577 |
| r _a the max: | 5 |

Calculation coefficient

| | |
|-----|------|
| e: | 0.15 |
| Y1: | 4.5 |
| Y2: | 6.7 |
| Y0: | 4.5 |