



Model: 248/1500CAFA/W2

0

Basic size of
mm

d:	1500
D:	1820
B:	315

The basic rated load is
kN

trends C:	12700
static state Co:	45000
Fatigue load limit Pu:	2400

Rated rotation speed is
r/min

Refer to the speed:	110
limit speed:	200
quality:	1710

model


Column hole:	248/1500CAFA/W20
conical bore:	248/1500CAK30FA/W2 0

Dimensions are
mm

d:	1500
d ₂ ~ :	1612
D1 ~ :	1719
b:	-
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
mm

d _a the min:	1528
----------------------------	------

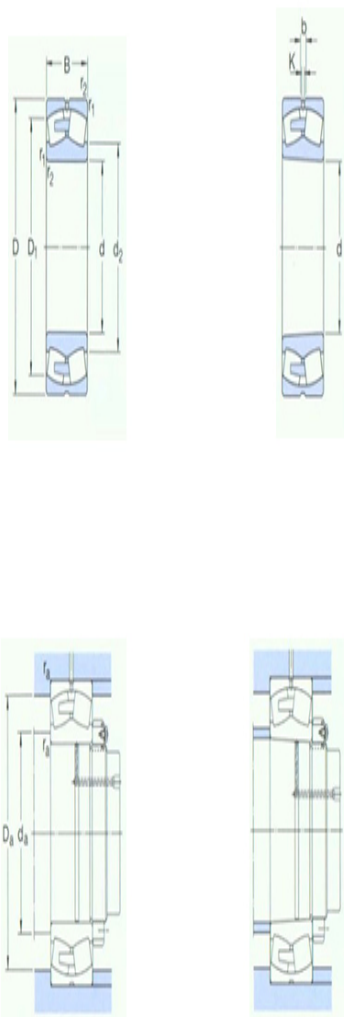

Da the max:	1792
r _a the max:	6

Calculation coefficient

e:	0.15
Y1:	4.5
Y2:	6.7
Y0:	4.5