



Model: 248/1320CAK30FA/W2

0

Basic size of
mm

d:	1320
D:	1600
B:	280

The basic rated load is
kN

trends C:	9780
static state Co:	33500
Fatigue load limit	1860
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	140
limit speed:	260
quality:	1160

model

Column hole:	248/1320CAFA/W20
conical bore:	248/1320CAK30FA/W20
	0


Dimensions are
mm

d:	1320
d ₂ ~ :	1417
D1 ~ :	1511
b:	-
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
mm

d _a the min:	1343
Da the max:	1577
r _a the max:	5

Calculation coefficient

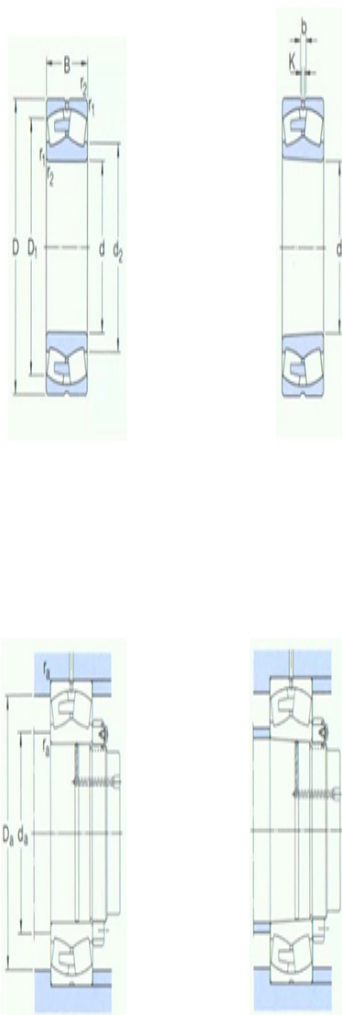

e:	0.15
Y1:	4.5
Y2:	6.7
Y0:	4.5