



Model: 22313E/VA405

Basic size of
mm

| | |
|----|-----|
| d: | 65 |
| D: | 140 |
| B: | 48 |

The basic rated load is
kN


| | |
|------------------------|-----|
| trends C: | 340 |
| static state Co: | 360 |
| Fatigue load limit Pu: | 38 |

Rated rotation speed is
r/min

| | |
|---------------------|------|
| Refer to the speed: | 3800 |
| limit speed: | 5000 |
| quality: | 3.75 |

model

| | |
|---------------|----------------|
| Column hole: | *22313E/VA405 |
| conical bore: | *22313EK/VA405 |

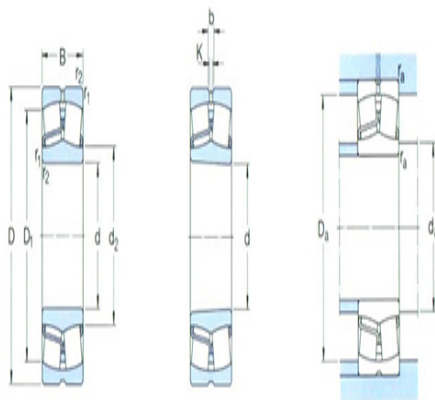

Dimensions are
mm

| | |
|---------------------------|------|
| d: | 65 |
| d ₂ ~ : | 81.6 |
| D1 ~ : | 118 |
| b: | 8.3 |
| k: | 4.5 |
| r _{1,2} the min: | 2.1 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|-----|
| d _a the min: | 77 |
| Da the max: | 128 |
| r _a the max: | 2 |

Calculation coefficient

| | |
|-----|------|
| e: | 0.35 |
| Y1: | 1.9 |

| | |
|-----|-----|
| Y2: | 2.9 |
| Y0: | 1.8 |

Allowable acceleration 1)

Only for oil-lubricated bearings

| | |
|----------------|-----|
| turn: | 69g |
| straight line: | 24g |