



Model: 22340CCKJA/W33VA40

5

Basic size of  
mm

|    |     |
|----|-----|
| d: | 200 |
| D: | 420 |
| B: | 138 |

The basic rated load is  
kN


|                       |      |
|-----------------------|------|
| trends C:             | 2320 |
| static state Co:      | 2900 |
| Fatigue load<br>limit | 224  |
| Pu:                   |      |

Rated rotation speed is  
r/min

|                        |      |
|------------------------|------|
| Refer to the<br>speed: | 1200 |
| limit speed:           | 1500 |
| quality:               | 95   |

model

|               |                          |
|---------------|--------------------------|
| Column hole:  | *22340CCJA/W33VA405      |
| conical bore: | *22340CCKJA/W33VA40<br>5 |

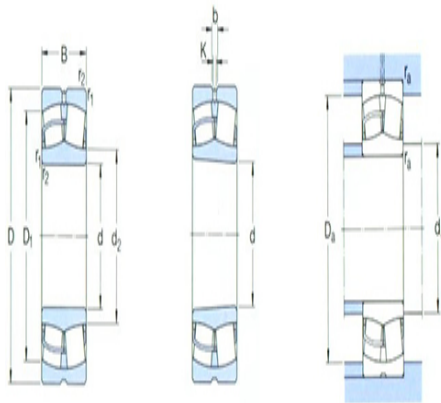

Dimensions are  
mm

|                           |      |
|---------------------------|------|
| d:                        | 200  |
| d <sub>2</sub> ~ :        | 248  |
| D1 ~ :                    | 351  |
| b:                        | 22.3 |
| k:                        | 12   |
| r <sub>1,2</sub> the min: | 5    |

Shoulder gear and chamfer size  
mm

|                         |     |
|-------------------------|-----|
| d <sub>a</sub> the min: | 220 |
| Da the max:             | 400 |
| r <sub>a</sub> the max: | 4   |

Calculation coefficient

|     |      |
|-----|------|
| e:  | 0.33 |
| Y1: | 2    |
| Y2: | 3    |
| Y0: | 2    |

Allowable acceleration 1)

Only for oil-lubricated bearings

|                |     |
|----------------|-----|
| turn:          | 55g |
| straight line: | 17g |