



Model: H3032

Basic size of
mm

| | |
|------------------|-----|
| d ₁ : | 140 |
| D : | 240 |
| B : | 60 |

The basic rated load is
kN


| | |
|-------------------------|-----|
| trends C : | 585 |
| static state Co : | 880 |
| Fatigue load limit Pu : | 83 |

Rated rotation speed is
r/min

| | |
|------------------------------------|------|
| Refer to the speed : | 2400 |
| limit speed : | 3000 |
| Mass bearing + tightening sleeve : | 14.5 |

model

| | |
|--------------------------|-------------------|
| bearing : | *23032CCK/W3 3 |
| tapered adapter-sleeve : | H3032 |

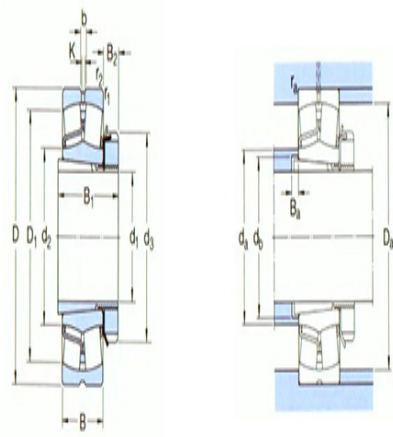

Dimensions are
mm

| | |
|----------------------------|------|
| d ₁ : | 140 |
| d ₂ ~ : | 180 |
| d ₃ : | 190 |
| D1 ~ : | 217 |
| B ₁ : | 93 |
| B ₂ : | 27.5 |
| b : | 11.1 |
| k : | 6 |
| r _{1,2} the min : | 2.1 |

Shoulder gear and chamfer size
mm

d_a the max: 180

d_b the min: 168

D_a the max: 229

B_a the min: 9

r_a the max: 2

Calculation coefficient

e: 0.22

Y1: 3

Y2: 4.6

Yo: 2.8