

## Model: H3132



Basic size of  
mm

d <sub>1</sub> :	140
D:	290
B:	80

The basic rated load is  
kN

trends C:	1000
static state Co:	1290
Fatigue load limit Pu:	118

Rated rotation speed is  
r/min

Refer to the speed:	2000
limit speed:	2800
Mass bearing + tightening sleeve:	29.3


model

bearing:	*22232CCK/W3
3	
tapered adapter- sleeve:	H3132

Dimensions are  
mm

d <sub>1</sub> :	140
d <sub>2</sub> ~ :	191
d <sub>3</sub> :	210
D1 ~ :	250
B <sub>1</sub> :	119
B <sub>2</sub> :	28
b:	13.9
k:	7.5
r <sub>1,2</sub> the min:	3

Shoulder gear and chamfer size  
mm

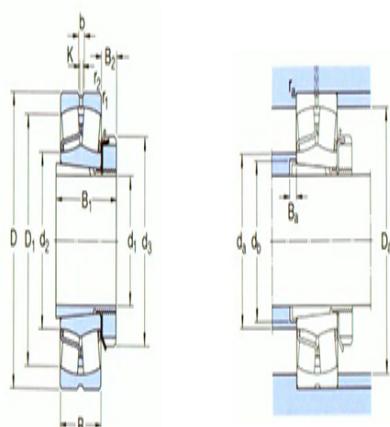

d <sub>a</sub> the max:	191
d <sub>b</sub> the min:	170
D <sub>a</sub> the max:	276
B <sub>a</sub> the min:	14
r <sub>a</sub> the max:	2.5

#### Calculation coefficient

e:	0.26
Y <sub>1</sub> :	2.6
Y <sub>2</sub> :	3.9
Y <sub>o</sub> :	2.5