



Model: H3034

Basic size of
mm

d ₁ :	150
D:	260
B:	67

The basic rated load is
kN

trends C:	710
static state Co:	1060
Fatigue load limit Pu:	100

Rated rotation speed is
r/min

Refer to the speed:	2200
limit speed:	2800
Mass bearing + tightening sleeve:	18.3


model

bearing:	*23034CCK/W3
3	
tapered adapter- sleeve:	H3034

Dimensions are
mm

d ₁ :	150
d ₂ ~ :	191
d ₃ :	200
D1 ~ :	232
B ₁ :	101
B ₂ :	28.5
b:	11.1
k:	6
r _{1,2} the min:	2.1

Shoulder gear and chamfer size
mm

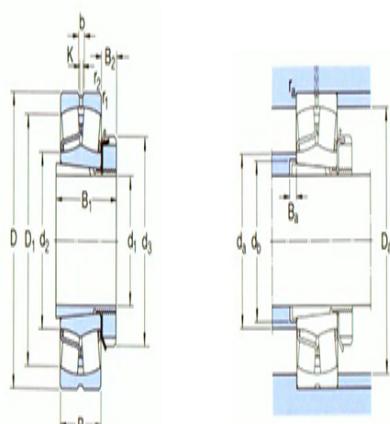

d _a the max:	191
d _b the min:	179
D _a the max:	249
B _a the min:	9
r _a the max:	2

Calculation coefficient

e:	0.23
Y ₁ :	2.9
Y ₂ :	4.4
Y _o :	2.8