



Model: 23940CCK/W33

Basic size of
 mm

d:	180
D:	280
B:	60

The basic rated load is
 kN


trends C:	546
static state Co:	1040
Fatigue load limit Pu:	93

Rated rotation speed is
 r/min

Refer to the speed:	2000
limit speed:	2400
Mass bearing + tightening sleeve:	19

model

bearing:	23940CCK/W33
	3
tapered adapter-sleeve:	H3940

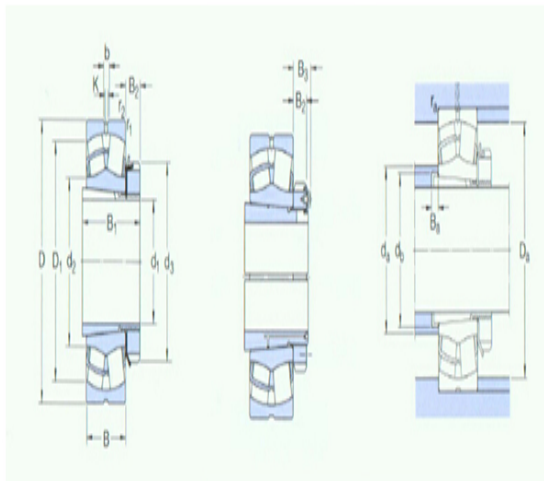

Dimensions are
 mm

d ₁ :	180
d ₂ ~ :	222
d ₃ :	240
D1 ~ :	258
B ₁ :	98
B ₂ :	31.5
B ₃ :	-
b:	8.3
k:	4.5
r _{1,2} the min:	2.1

Shoulder gear and chamfer size
 mm

d_a the max: 222

d_b the min: 208

D_a the max: 269

B_a the min: 10

r_a the max: 2

Calculation coefficient

e: 0.19

Y1: 3.6

Y2: 5.3

Yo: 3.6