



**Model: 23044CCK/W33**

Basic size of  
mm

d:	200
D:	340
B:	90

The basic rated load is  
kN


trends C:	1220
static state Co:	1860
Fatigue load limit Pu:	163

Rated rotation speed is  
r/min

Refer to the speed:	1600
limit speed:	2000
Mass bearing + tightening sleeve:	39.4

model

bearing:	*23044CCK/W33
tapered adapter-sleeve:	OH3044H

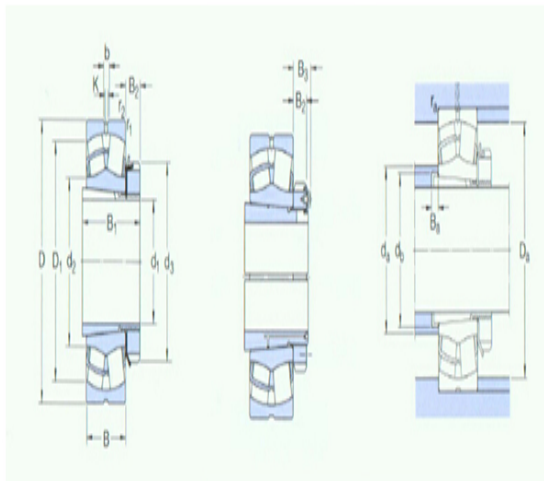

Dimensions are  
mm

d <sub>1</sub> :	200
d <sub>2</sub> ~ :	250
d <sub>3</sub> :	260
D1 ~ :	306
B <sub>1</sub> :	126
B <sub>2</sub> :	30
B <sub>3</sub> :	41
b:	13.9
k:	7.5
r <sub>1,2</sub> the min:	3

Shoulder gear and chamfer size

mm

$d_a$ the max:	250
$d_b$ the min:	231
$D_a$ the max:	327
$B_a$ the min:	10
$r_a$ the max:	2.5

Calculation coefficient

e:	0.24
Y1:	2.8
Y2:	4.2
Yo:	2.8