



**Model: 23244CCK/W33**

Basic size of  
mm

d:	200
D:	400
B:	144

The basic rated load is  
kN


trends C:	2360
static state Co:	3450
Fatigue load limit Pu:	285

Rated rotation speed is  
r/min

Refer to the speed:	1100
limit speed:	1500
Mass bearing + tightening sleeve:	96.5

model

bearing:	*23244CCK/W33
tapered adapter-sleeve:	OH2344H

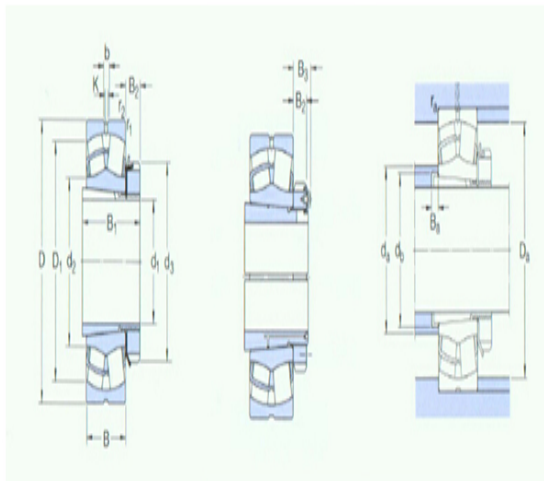

Dimensions are  
mm

d <sub>1</sub> :	200
d <sub>2</sub> ~ :	259
d <sub>3</sub> :	280
D1 ~ :	338
B <sub>1</sub> :	186
B <sub>2</sub> :	35
B <sub>3</sub> :	-
b:	16.7
k:	9
r <sub>1,2</sub> the min:	4

Shoulder gear and chamfer size

mm

$d_a$ the max:	259
$d_b$ the min:	236
$D_a$ the max:	383
$B_a$ the min:	11
$r_a$ the max:	3

Calculation coefficient

e:	0.35
Y1:	1.9
Y2:	2.9
Yo:	1.8