



Model: 23948CCK/W33

Basic size of
mm

d:	220
D:	320
B:	60

The basic rated load is
kN


trends C:	564
static state Co:	1160
Fatigue load limit Pu:	98

Rated rotation speed is
r/min

Refer to the speed:	1700
limit speed:	2000
Mass bearing + tightening sleeve:	24.5

model

bearing:	23948CCK/W33
tapered adapter-sleeve:	OH3948H

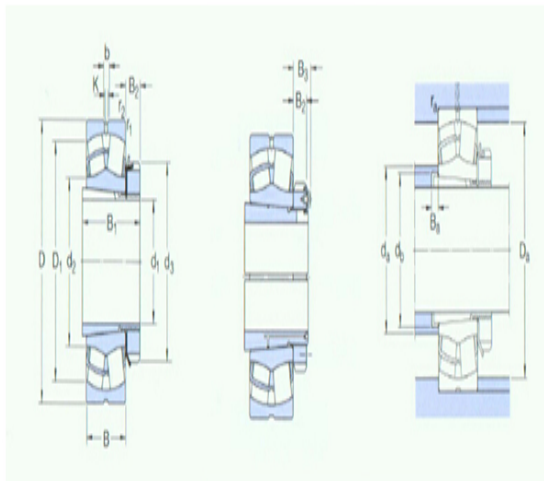

Dimensions are
mm

d ₁ :	220
d ₂ ~ :	261
d ₃ :	290
D1 ~ :	298
B ₁ :	101
B ₂ :	34
B ₃ :	46
b:	8.3
k:	4.5
r _{1,2} the min:	2.1

Shoulder gear and chamfer size
mm

d_a the max:	261
d_b the min:	249
D_a the max:	309
B_a the min:	12
r_a the max:	2

Calculation coefficient

e:	0.15
Y1:	4.5
Y2:	6.7
Yo:	4.5