



**Model: 23060CCK/W33**

Basic size of  
 mm

d:	280
D:	460
B:	118

The basic rated load is  
 kN


trends C:	2120
static state Co:	3450
Fatigue load limit Pu:	265

Rated rotation speed is  
 r/min

Refer to the speed:	1200
limit speed:	1500
Mass bearing + tightening sleeve:	90

model

bearing:	*23060CCK/W33
tapered adapter-sleeve:	OH3060H

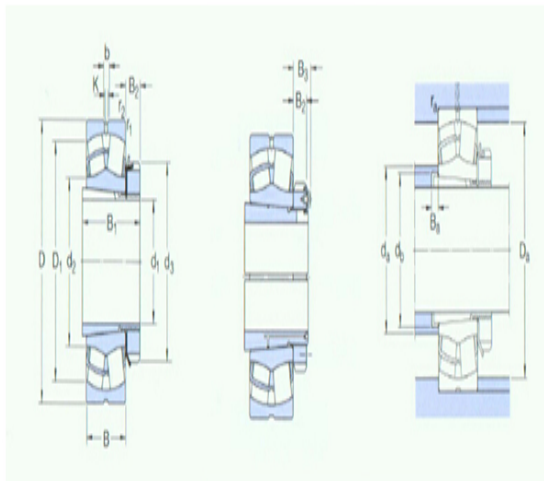

Dimensions are  
 mm

d <sub>1</sub> :	280
d <sub>2</sub> ~ :	340
d <sub>3</sub> :	360
D1 ~ :	414
B <sub>1</sub> :	168
B <sub>2</sub> :	42
B <sub>3</sub> :	54
b:	16.7
k:	9
r <sub>1,2</sub> the min:	4

Shoulder gear and chamfer size

mm

$d_a$  the max: 340

$d_b$  the min: 313

$D_a$  the max: 445

$B_a$  the min: 12

$r_a$  the max: 3

Calculation coefficient

e: 0.23

Y1: 2.9

Y2: 4.4

Yo: 2.8