



Model: H3040

Basic size of
mm

d:	180
D:	310
B:	82

The basic rated load is
kN


trends C:	1000
static state Co:	1530
Fatigue load limit Pu:	137

Rated rotation speed is
r/min

Refer to the speed:	1800
limit speed:	2200
Mass bearing + tightening sleeve:	31.7

model

bearing:	*23040CCK/W3 3
tapered adapter-sleeve:	H3040

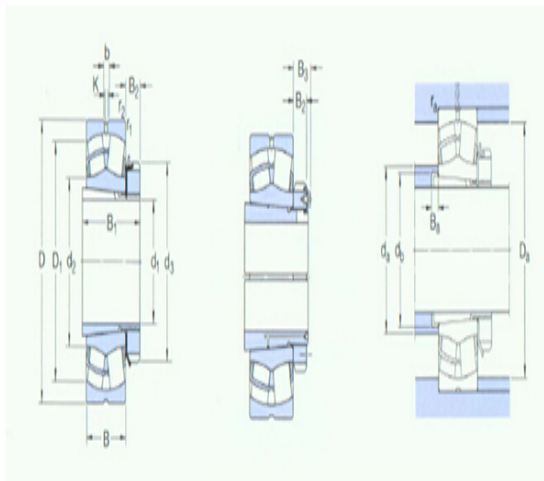

Dimensions are
mm

d ₁ :	180
d ₂ ~ :	228
d ₃ :	240
D1 ~ :	278
B ₁ :	120
B ₂ :	31.5
B ₃ :	-
b:	13.9
k:	7.5
r _{1,2} the min:	2.1

Shoulder gear and chamfer size

mm

d_a the max: 228

d_b the min: 210

D_a the max: 299

B_a the min: 10

r_a the max: 2

Calculation coefficient

e: 0.24

Y1: 2.8

Y2: 4.2

Yo: 2.8