



Model: OH3044H

Basic size of
mm

d:	200
D:	340
B:	90

The basic rated load is
kN


trends C:	1220
static state Co:	1860
Fatigue load limit Pu:	163

Rated rotation speed is
r/min

Refer to the speed:	1600
limit speed:	2000
Mass bearing + tightening sleeve:	39.4

model

bearing:	*23044CCK/W3 3
tapered adapter-sleeve:	OH3044H

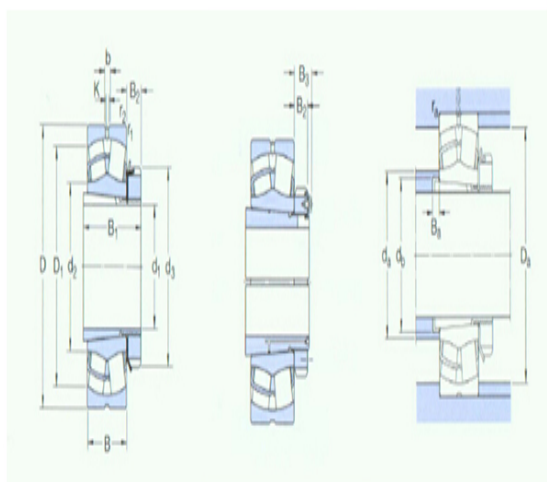

Dimensions are
mm

d ₁ :	200
d ₂ ~ :	250
d ₃ :	260
D1 ~ :	306
B ₁ :	126
B ₂ :	30
B ₃ :	41
b:	13.9
k:	7.5
r _{1,2} the min:	3

Shoulder gear and chamfer size

mm

d_a the max:	250
d_b the min:	231
D_a the max:	327
B_a the min:	10
r_a the max:	2.5

Calculation coefficient

e:	0.24
Y1:	2.8
Y2:	4.2
Yo:	2.8