



## Model: OH3148H

Basic size of  
mm

d:	220
D:	400
B:	128

The basic rated load is  
kN


trends C:	2080
static state Co:	3200
Fatigue load limit Pu:	255

Rated rotation speed is  
r/min

Refer to the speed:	1200
limit speed:	1600
Mass bearing + tightening sleeve:	80.5

model

bearing:	*23148CCK/W3 3
tapered adapter-sleeve:	OH3148H

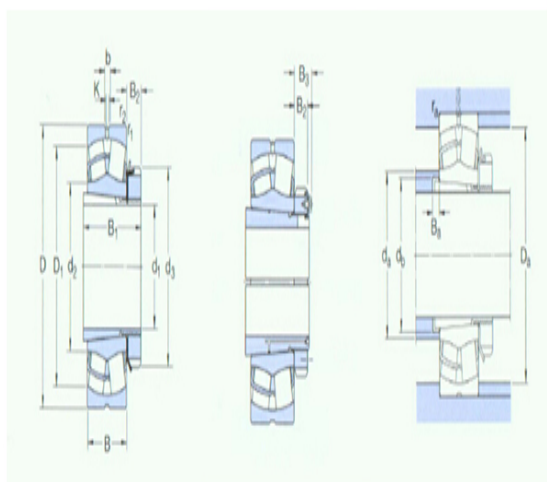

Dimensions are  
mm

d <sub>1</sub> :	220
d <sub>2</sub> ~ :	277
d <sub>3</sub> :	300
D1 ~ :	348
B <sub>1</sub> :	172
B <sub>2</sub> :	37
B <sub>3</sub> :	-
b:	16.7
k:	9
r <sub>1,2</sub> the min:	4

Shoulder gear and chamfer size

mm

$d_a$ the max:	277
$d_b$ the min:	254
$D_a$ the max:	383
$B_a$ the min:	11
$r_a$ the max:	3

Calculation coefficient

e:	0.3
Y1:	2.3
Y2:	3.4
Yo:	2.2