



Model: OH2348H

Basic size of
mm

d:	220
D:	440
B:	160

The basic rated load is
kN


trends C:	2900
static state Co:	4300
Fatigue load limit Pu:	345

Rated rotation speed is
r/min

Refer to the speed:	950
limit speed:	1300
Mass bearing + tightening sleeve:	125

model

bearing:	*23248CCK/W3 3
tapered adapter-sleeve:	OH2348H

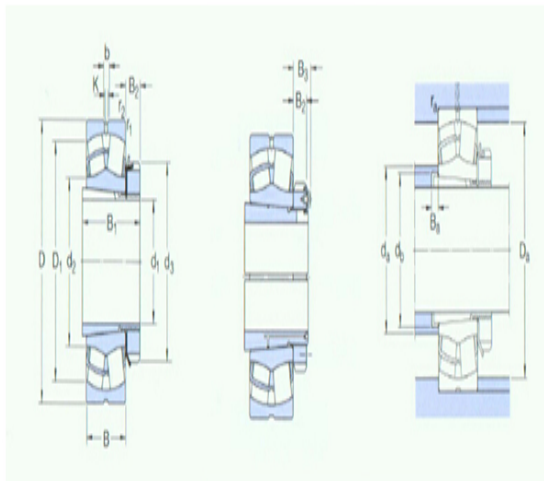

Dimensions are
mm

d ₁ :	220
d ₂ ~ :	286
d ₃ :	300
D1 ~ :	374
B ₁ :	199
B ₂ :	37
B ₃ :	-
b:	22.3
k:	12
r _{1,2} the min:	4

Shoulder gear and chamfer size

mm

d_a the max: 286

d_b the min: 257

D_a the max: 423

B_a the min: 6

r_a the max: 3

Calculation coefficient

e: 0.35

Y1: 1.9

Y2: 2.9

Yo: 1.8