



Model: OH2348H

Basic size of
mm

d:	220
D:	500
B:	155

The basic rated load is
kN


trends C:	3100
static state Co:	4000
Fatigue load limit Pu:	290

Rated rotation speed is
r/min

Refer to the speed:	950
limit speed:	1300
Mass bearing + tightening sleeve:	170

model

bearing:	*22348CCK/W3 3
tapered adapter-sleeve:	OH2348H

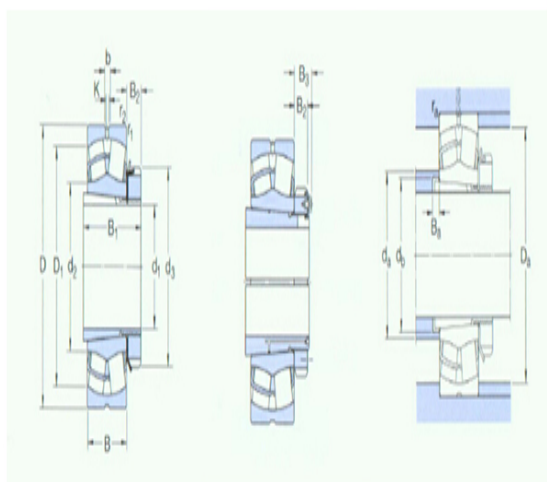

Dimensions are
mm

d ₁ :	220
d ₂ ~ :	303
d ₃ :	300
D1 ~ :	423
B ₁ :	199
B ₂ :	37
B ₃ :	-
b:	22.3
k:	12
r _{1,2} the min:	5

Shoulder gear and chamfer size

mm

d_a the max:	303
d_b the min:	257
D_a the max:	480
B_a the min:	11
r_a the max:	4

Calculation coefficient

e:	0.31
Y1:	2.2
Y2:	3.3
Yo:	2.2