



**Model: OH2352H**

Basic size of  
 mm

d:	240
D:	540
B:	165

The basic rated load is  
 kN


trends C:	3550
static state Co:	4550
Fatigue load limit Pu:	325

Rated rotation speed is  
 r/min

Refer to the speed:	850
limit speed:	1100
Mass bearing + tightening sleeve:	215

model

bearing:	*22352CCK/W3 3
tapered adapter-sleeve:	OH2352H

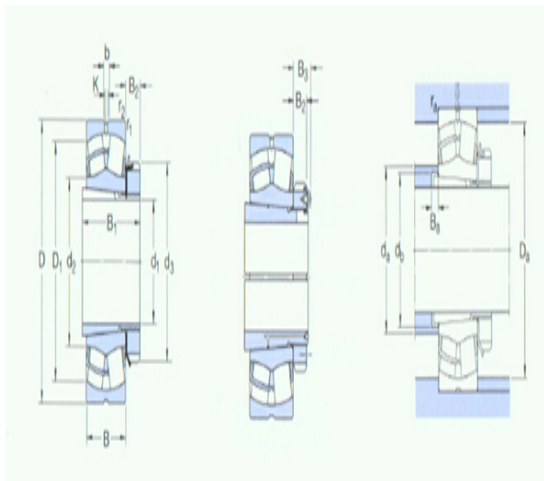

Dimensions are  
 mm

d <sub>1</sub> :	240
d <sub>2</sub> ~ :	328
d <sub>3</sub> :	330
D1 ~ :	458
B <sub>1</sub> :	211
B <sub>2</sub> :	39
B <sub>3</sub> :	-
b:	22.3
k:	12
r <sub>1,2</sub> the min:	6

Shoulder gear and chamfer size

mm

$d_a$  the max: 328

$d_b$  the min: 278

$D_a$  the max: 514

$B_a$  the min: 11

$r_a$  the max: 5

Calculation coefficient

e: 0.31

Y1: 2.2

Y2: 3.3

Yo: 2.2