



Model: OH3956H

Basic size of
mm

d:	260
D:	380
B:	75

The basic rated load is
kN


trends C:	845
static state Co:	1760
Fatigue load limit Pu:	143

Rated rotation speed is
r/min

Refer to the speed:	1400
limit speed:	1700
Mass bearing + tightening sleeve:	40

model

bearing:	23956CCK/W3 3
tapered adapter-sleeve:	OH3956H

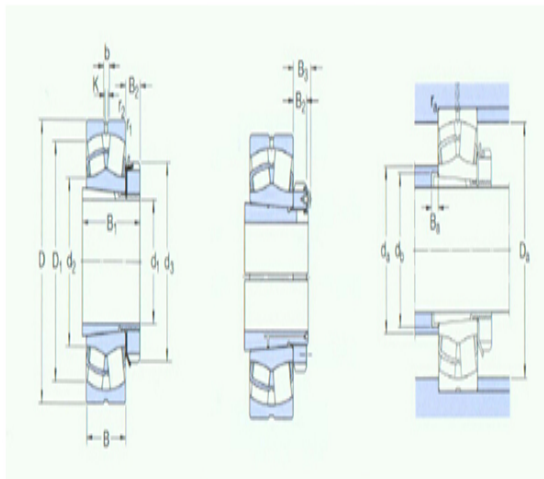

Dimensions are
mm

d ₁ :	260
d ₂ ~ :	308
d ₃ :	330
D1 ~ :	352
B ₁ :	121
B ₂ :	38
B ₃ :	50
b:	11.1
k:	6
r _{1,2} the min:	2.1

Shoulder gear and chamfer size
mm

d_a the max:	308
d_b the min:	290
D_a the max:	369
B_a the min:	12
r_a the max:	2

Calculation coefficient

e:	0.16
Y1:	4.2
Y2:	6.3
Yo:	4