



Model: OH3056H

Basic size of
 mm

d:	260
D:	420
B:	106

The basic rated load is
 kN


trends C:	1730
static state Co:	2850
Fatigue load limit Pu:	224

Rated rotation speed is
 r/min

Refer to the speed:	1300
limit speed:	1600
Mass bearing + tightening sleeve:	67

model

bearing:	*23056CCK/W3 3
tapered adapter-sleeve:	OH3056H

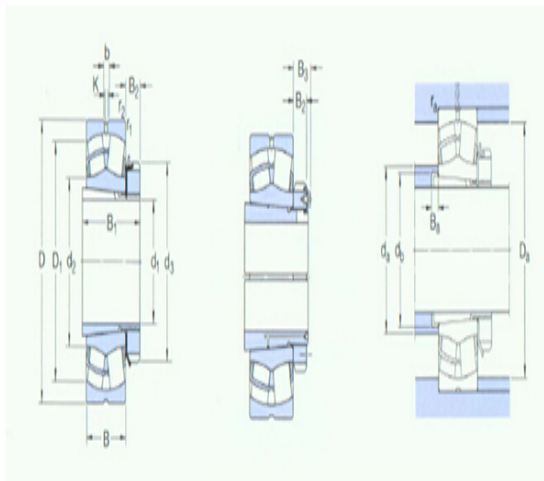

Dimensions are
 mm

d ₁ :	260
d ₂ ~ :	315
d ₃ :	330
D1 ~ :	380
B ₁ :	152
B ₂ :	38
B ₃ :	50
b:	16.7
k:	9
r _{1,2} the min:	4

Shoulder gear and chamfer size

mm

d_a the max: 315

d_b the min: 292

D_a the max: 405

B_a the min: 12

r_a the max: 3

Calculation coefficient

e: 0.23

Y1: 2.9

Y2: 4.4

Yo: 2.8